

SWIT®

LED Panel Lights S-2120CA / S-2120CS

Ver:A

USER MANUAL


SWIT Electronics Co.,Ltd.

Tel:+86-25-85805753
Fax:+86-25-85805296
http://www.swit.cc
E-mail: contact@swit.cc


Thank you for choosing SWIT products. Please read the instructions before using, and keep it for future reference.

Front and rear view

Front view:

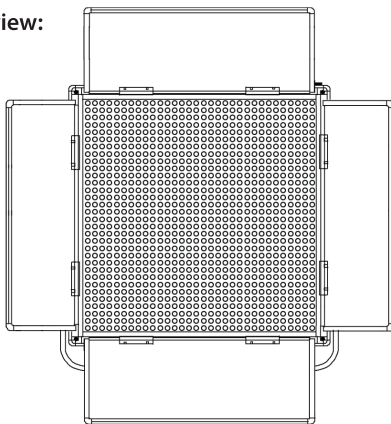

Rear view:

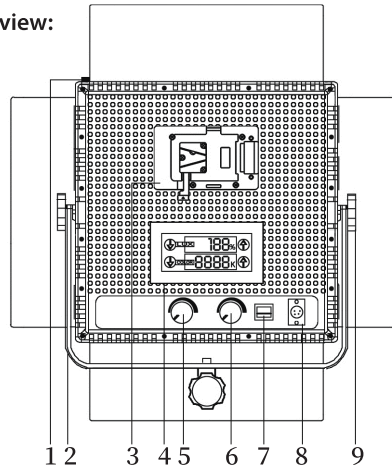

1. Lock catch for the diffuser
2. U-shape bracket
3. Gold mount / V-mount plate
4. LCD touch screen
5. CT dimming knob
6. Brightness dimming knob
7. Power switch
8. 4-pin XLR socket
9. Fastening screw

Characteristics

- ◆ 1024pcs of ultra bright LEDs, 50,000hrs long lifetime
- ◆ Max luminance: 2600Lux (3200K), 2800Lux (5600K) at 1m distance; 10%-100% flick-free dimming
- ◆ 3200K to 5600K continuously adjustable color temperature
- ◆ LCD touch screen, display and adjust color temperature and brightness dimming
- ◆ Power with V-lock battery (S-2120CS)/Gold mount battery (S-2120CA), or AC-DC adapter
- ◆ Heat-free technology and constant current circuit design ensure consistent, stable, and accurate light output in various environments
- ◆ Designed for professional videography and photography

Cautions

1. Never disassemble the light or touch its inside with metal objects to avoid damage.
2. Never solder the LED bulbs by non-professionals
3. Never block the louvers, otherwise LED lighting effect and lifetime will be greatly reduced
4. Only use the provided adapter to avoid damage.
5. Never crash the LED touch screen with great force to avoid damage.
6. Only use the light in the temperature range of -10°C~40°C.

Packing List

| | Packing details | Quantity |
|---|-------------------|----------|
| 1 | S-2120CA/S-2120CS | × 1 |
| 2 | Diffuser | × 1 |
| 3 | U-shape bracket | × 1 |
| 4 | Power adapter | × 1 |
| 5 | Power cable | × 1 |
| 6 | User manual | × 1 |
| 7 | Warranty card | × 1 |

Operation instructions

1. Open the barn door, set up the U-shape bracket on the light stand or bracket, and then fasten it. Loosen the knobs on both sides of the U-shape bracket, and then fix the knobs after adjusting the lighting angle.
2. Power the light with the AC power adapter or corresponding battery, turn it on and then the light works.
3. The upper side of the LCD shows brightness. Press “↑”, “↓” or rotate brightness dimming knob to adjust the brightness from 10%-100%.
4. The bottom side of the LCD shows color temperature. Press “↑”, “↓” or rotate CT dimming knob to adjust the color temperature from 3200K-5600K.
5. The diffuser can be removed from the groove in front of the LED by pressing button 1.

Specifications

| MODEL | S-2120CA | S-2120CS |
|-------------------|-------------------------------------|---------------|
| LED | 1024pcs of ultra bright LEDs | |
| Luminance | 3200K: 2600Lux/m; 5600K: 2800Lux/m | |
| Beam angle | 60° | |
| CRI | 97 | |
| Color temperature | 3200K-5600K continuously adjustable | |
| Power | ≤70W | |
| Working voltage | DC 11-17V, 4-pin XLR socket | |
| External power | Gold mount plate | V-mount plate |
| Dimension | 403(W)×450(H)×95(D)mm | |
| Weight | 2.7kg | |