


SWIT[®]

K7 7" 2800nits SDI & HDMI CINE CAMERA MONITOR



■ Features

- > 7-inch, 1920×1080 FHD optically bonded display
- > Multi-touch screen and physical control buttons
- > 2,800nits ultra bright display for sunlight viewing
- > All-metal with protective rubber corners guards
- > 3G/HD-SDI and HDMI 2.0 (4K60p) in & out
- > Support SDI/HDMI cross conversion, output with LUT
- > Built-in Delog Luts and User Luts import via SD card
- > Screenshot capture and overlay with transparency
- > Anamorphic desqueeze custom ratio 0.5x - 2x
- > Peaking, Zebra, False color and full assist scopes
- > 4-ch audio meters and a 3.5mm audio output
- > Built-in dual NP-F battery slots with hot-swap
- > 2-pin LEMO 7-34V and USB-C PD 9-20V DC input
- > Optional monitor cage and sunhood kit available

■ Interfaces

7-inch Display Panel
1920×1080 2,800nits

SD card
User LUTs
Firmware
Captured Images

Dual NP-F Battery Plates
Battery level display & Hot-swap

MENU Key
Rotate - Select
Press - Enter
Long Press - Quit

Long Press - Touch Lock

Transparency Overlay

F2 (Default: Browse Images)

F1 (Default: Screenshot Capture)

ON/OFF
Power indicator


Rubber Corners
Anti-crash guards

3G/HD-SDI IN & LOOP
Output with LUT / convert to HDMI

2-pin LEMO
DC 7-34V input

USB-C
PD 9-20V input

HDMI 2.0 4K60P IN & LOOP
Output with LUT / convert to SDI

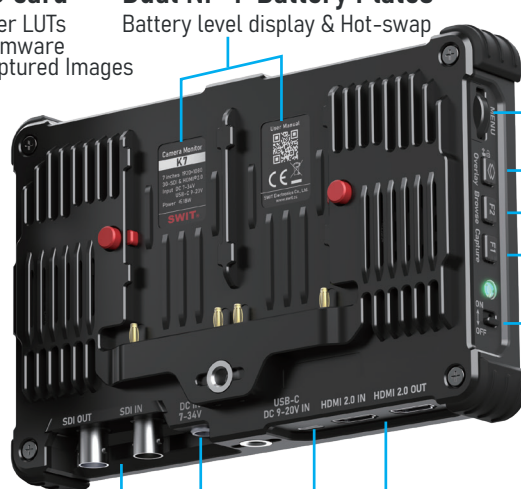

■ Touch Operations



Double Tap for Main Menu



Swipe up from bottom to open Quick Tools




Left part up/down - Backlight adjust
Right part up/down - Volume adjust
Pinch with 2 fingers - Quick Zoom-in/out

■ Screenshot Capture and Overlay

Capture a still image of the current frame and overlay it with adjustable transparency over the live camera video, which allows you to perfectly match a camera move, reposition a subject, or recreate a previous framing by matching the semi-transparent reference image with the live action.



Capture the current frame and save it to the SD card

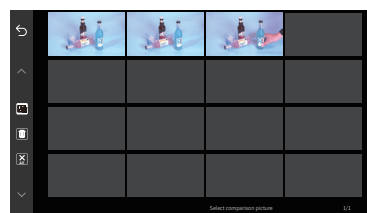


Browse the captured image and select one to overlay




Overlay the selected image to video with transparency

■ More Monitor Tools

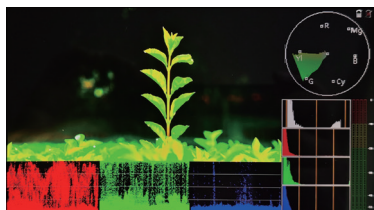


Waveforms / Vector / Histogram
4-ch audio meters display

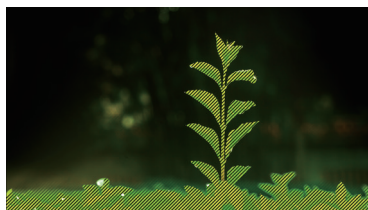

Zebra Stripes Tool
with IRE -7~+109 setting




False Color Tool
ARRI mode & Spectrum mode

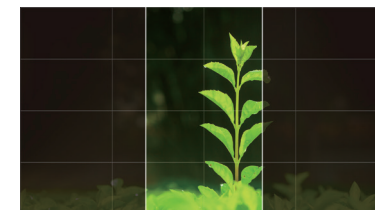

Aspect Mark / Grid / Anamorphic
with custom ratio setting


■ Package

Includes:

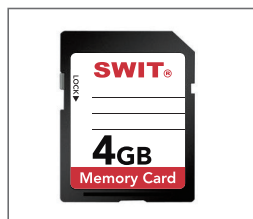

4GB SD Card
for LUT/Firmware

Optional Purchase:

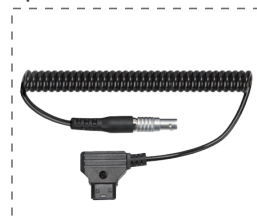


D-tap to 2-pin LEMO
(PA-D2L2)



AC to 2-pin LEMO
adaptor (PA-ACL2)



V-mount to NP-F Reg.8.4V
Plate (KA-F20S)

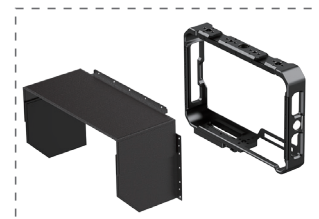

Monitor Cage and Sunhood Kit
(MA-K7CAGE)

