

SWIT®

FLYDUO



Long Power



Fly Compliant



D-TAP
×2

USB-C
100w

Dual Pocket V-mounts Hot-Swap Adaptor

KA-M20C

■ Fit 2× Pocket V-mount Batteries

Separate to Fly, Combine for Long Power



Fit PB-M98S
& PB-M146S

Fit MINO-S70
MINO-S140 &
MINO-S210

Fit OMNI-50S
& OMNI-99S


■ 2× D-tap and 1× USB-C Outputs

To Power More On-camera Devices



■ Hot-Swap Mode / High-Load Mode

Use 2 batteries one-by-one or simultaneously

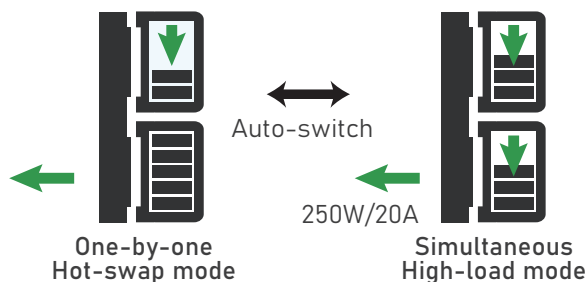

For low-power devices, the 2 batteries are used one by one, hot-swap when one runs out, enabling uninterrupted power. When the device's power demand exceeds a single battery's load, it automatically switches to High-load mode, using both batteries simultaneously for up to 250W/20A output.

■ Specifications

Input	2× V-mount 10.8-16.8V
	1× V-mount 10.8-16.8V
Output	2× D-tap 10.8-16.8V
	1× USB-C 5V/9V/12V/15V=3A; 20V=5A
Power Load	One-by-One Mode:
	Equals to the Max load of single battery
	High-Load Mode:
Size	V-mount & D-tap: 250W/20A constant
	Total output ≤ sum of 2 battery loads
Weight	153×107.4×31.9mm
	383.5g


SWIT Electronics Co., Ltd.
+86-25-85805753
<http://www.swit.cc>
Email: contact@swit.cc

SWIT Electronics America, Inc
1-(408)260-8258
<http://www.switusa.com>
Email: info@swit.us

SWIT Electronics Europe GmbH
+49(0)21316632331
<http://www.switeu.com>
Email: info@swit-europe.com



Facebook Page



Instagram